


CASSETTE DE FIBRA OPTICA SPT01

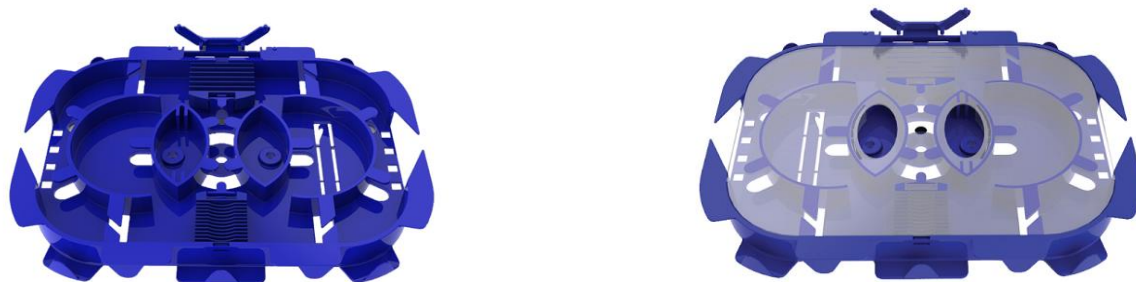

Description

Introducing the revolutionary new Speedway splice tray with unrivaled ease of use and flexibility. Featuring a unique external fiber pathway and pivoting splice holder arrangement this tray redefines the concept of splice management, combining fiber management and splicing control in one product. Due to its accommodating internal dimensions the Speedway splice tray is able to comfortably hold 24 splices with either heatshrink or crimp German style splice protectors with up to 900µm buffered fibers.

Features / Benefits

- Unique external fiber pathway allows easy storage of excess fiber and multi-directional routing of entry and exit fibers
- Spacious interior maintains 30mm fiber bend radius and allows storage of either 250µm or 900µm buffered fiber
- Internal management allows multiple fiber routing options including cross over
- Pivoting splice holders allow uninterrupted control of fiber prior to splicing and during rework
- Built in fiber pick can be used to withdraw individual fibers and can be stored in the tray after use
- Will hold up to 24 splices with either heatshrink or crimp style splice protectors
- Supplied with tray hinge to maintain access to splices with stacked trays
- Transparent clip in lid supplied with every tray
- Cable tie points to secure fiber on entry and exit
- Mountable via central hole, DIN style holes or double sided foam adhesive pad

Applications

- Fiber management
- Internal and external
- Wall boxes
- Patch panels

Specifications

Element	Value
Width	168 mm
Dpeth	124 mm
Height	13 mm
Net weight	81g
Material	ABD
Colour	Blue
Operating temperature	-40°C TO + 60°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754,
Complaint to	RoHS, Reach/SVHC

