

## XGS4600 Series

28/48-port GbE L3 Managed Switch with 4 SFP+ Uplink

Bandwidth-intensive applications such as multimedia streaming, VoIP and video surveillance are used daily in business networks for more efficient workflows. However, the networks could be overloaded and that causes reduced business productivity. Deploying 10-Gigabit Ethernet ports at the aggregation layer to deal with bandwidth-intensive networks becomes the top choice of users such as hospitality venues and education institutions. Zyxel's brand new Layer-3 stackable XGS4600 Switch Series comes with Gigabit connectivity and four integrated 10-Gigabit SFP+ slots that enable high-speed uplink connections for affordable, reliable network elements. In addition to the current popular 32-port models in both copper and fiber choices, now 52 fiber port model is available for high port-count aggregation deployment options. The front panel with carbon fiber look brings a totally fresh look than traditional switches. Under the elegant hood, the XGS4600 Series not only features advanced L2 switching functionality, but also L3 routing capabilities for communications between networks.

### Benefits

#### High availability

To implement fault-tolerant networks, the Zyxel XGS4600 Series allows creating a physical stack through one or two 10-Gigabit SFP+ slots. Four units or 112 Gigabit ports can be configured as a stack using optional direct-attach cables or transceivers to provide high bandwidth on the XGS4600 Series for more flexible management. The stacking topology under the ring architecture provides high redundancy in case one of the stacking links fail. The system can quickly recover through another stacking connection. The XGS4600 Series is designed to support active-standby power redundancy to trigger backup power supply to take over in case the main power supply fails.



New ID design with carbon fiber look name plate delivers the modern look-and-feel in the closet



Four built-in 10G SFP+ uplinks enable congestion-free, smooth data delivery for high-bandwidth applications



Provides high-bandwidth with true physical stacking of up to 4 units and 112 Gigabit ports



High resiliency with redundant power supply units



## Advanced L3 features

Hierarchical business networks become more complex because of the increased communication among subnets. The XGS4600 Series features dynamic routing to simplify cross-subnet communications for businesses such as hospitality venues and education institutions that operate complex networks. In addition, the XGS4600 Series comes with full Layer-2 switching and Layer-3 routing capabilities if the system is working under the stacking mode. The stackable structure greatly enlarges network coverage as well as network resiliency that most enterprise networks require.

## Model List

### XGS4600-32

28-port GbE L3 Managed Switch with 4 SFP+ Uplink



- 24 x GbE RJ-45 ports
- 4 x GbE combo (RJ-45/SFP) ports
- 4 x 10 GbE SFP+ slots
- Stackable

## Flexible management and future-proof networks

The XGS4600 Series can be managed via CLI which is consistent with Zyxel managed switches, while the intuitive Web-based GUI helps skilled network administrators to quickly become more productive. As the IP address scheme evolves to accommodate a growing number of network devices, the Zyxel XGS4600 Series assures businesses a smooth migration path from IPv4-based networks to a full IPv6 infrastructure for protection to the investments in future network upgrades.

### XGS4600-32F

28-port GbE L3 Managed Fiber Switch with 4 SFP+ Uplink



- 24 x GbE SFP slots
- 4 x GbE combo (RJ-45/SFP) ports
- 4 x 10 GbE SFP+ slots
- Stackable

### XGS4600-52F

NEW


48-port GbE L3 Managed Fiber Switch with 4 SFP+ Uplink




- 48 x GbE SFP slots
- 4 x 10 GbE SFP+ slots
- Standalone

## Robust Hardware

High-quality hardware design ensures stability and longevity for XGS4600 Series on your networks.

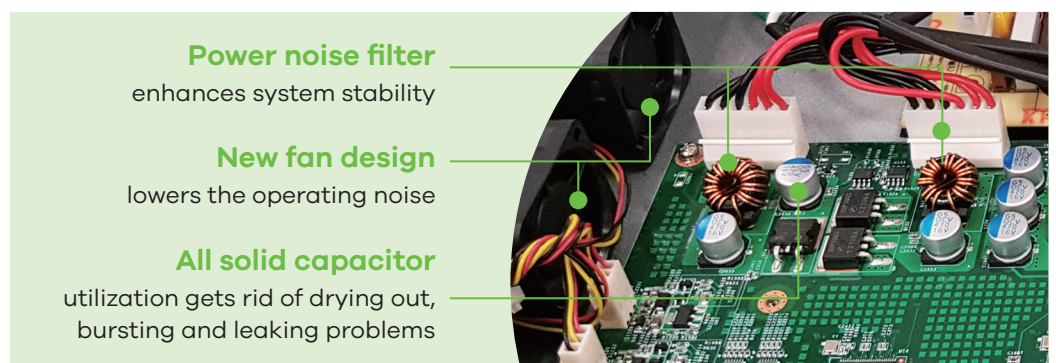

# Application Diagram

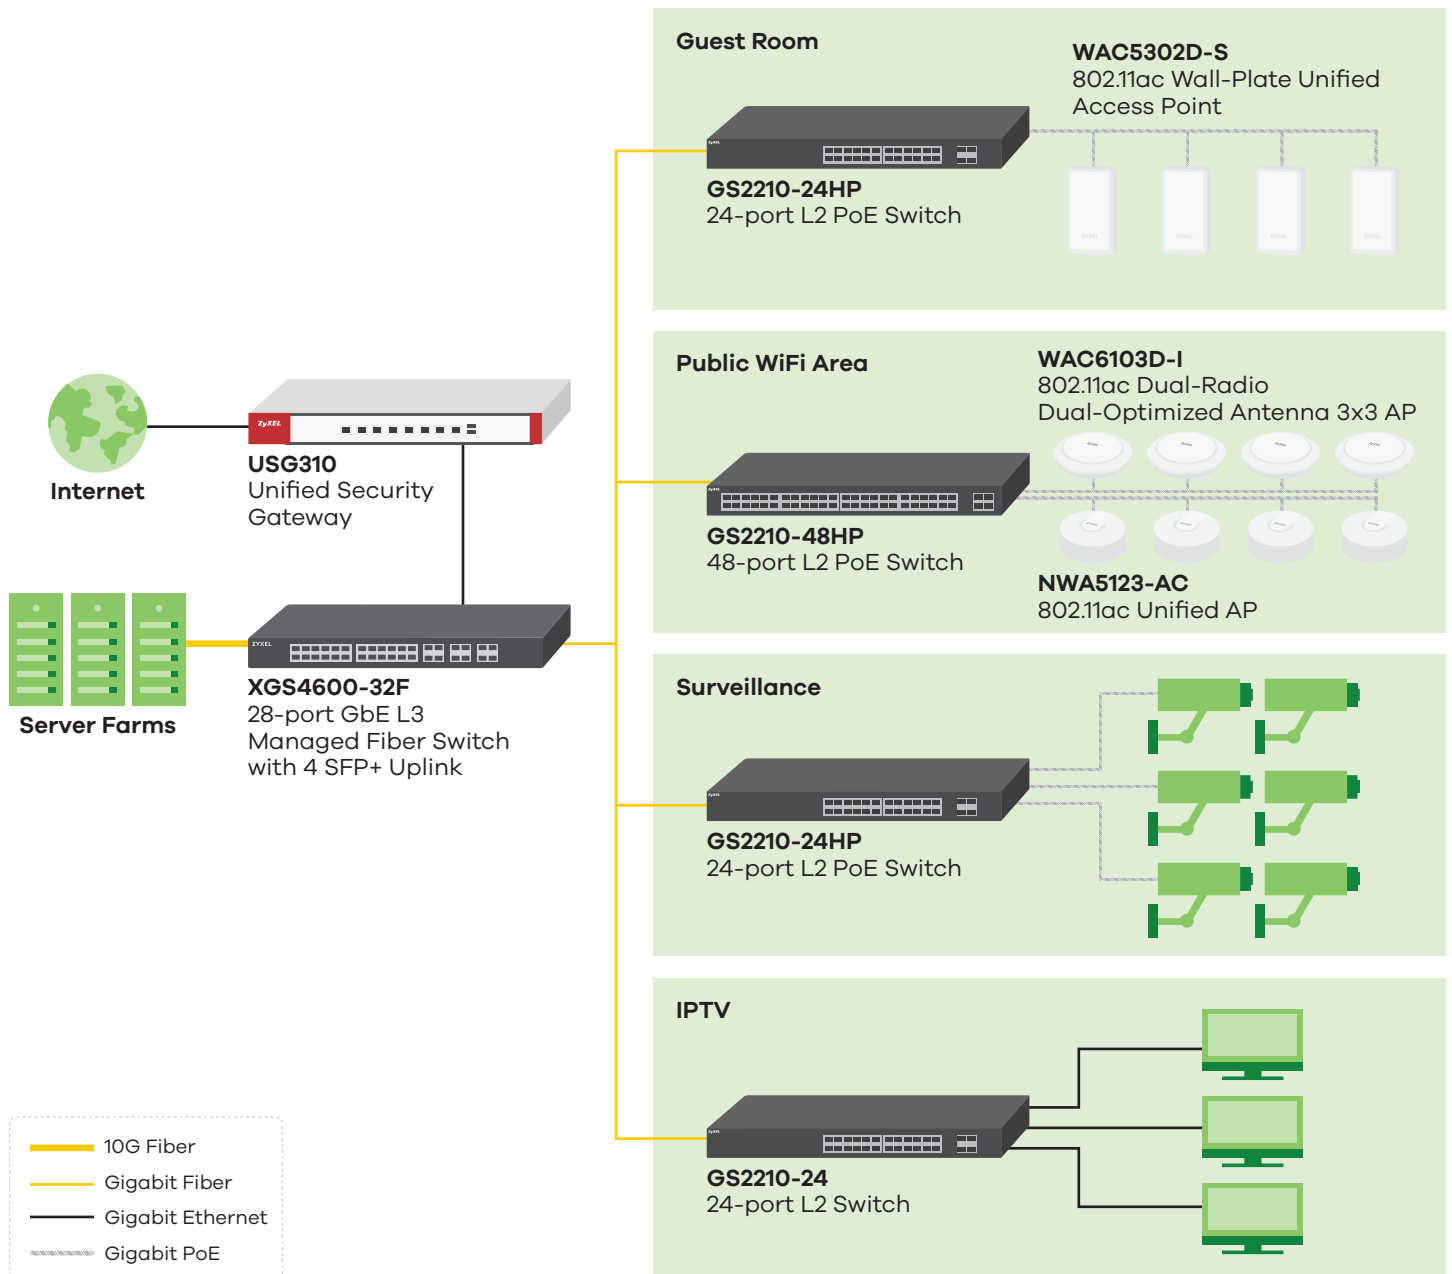

## Specifications

Model	XGS4600-32	XGS4600-32F	XGS4600-52F	
<b>Product name</b>	28-port GbE L3 Managed Switch with 4 SFP+ Uplink	28-port GbE L3 Managed Fiber Switch with 4 SFP+ Uplink	48-port GbE L3 Managed Fiber Switch with 4 SFP+ Uplink	
<b>Switch class</b>	Layer 3	Layer 3	Layer 3	
<b>Port Density</b>				
<b>Total port count</b>	32	32	52	
<b>Gigabit SFP</b>	-	24	48	
<b>100/1000 Mbps</b>	24	-	-	
<b>Gigabit combo (SFP/RJ-45)</b>	4	4	-	
<b>10-Gigabit SFP+</b>	4	4	4	
<b>Performance</b>				
<b>Switching capacity (Gbps)</b>	136	136	176	
<b>Forwarding rate (Mpps)</b>	101.1	101.1	130.9	
<b>Packet buffer (byte)</b>	4 MB	4 MB	4 MB	
<b>MAC address table</b>	32K	32K	32K	
<b>L3 forwarding table</b>	Max. 8K IPv4 entries; Max. 4K IPv6 entries	Max. 8K IPv4 entries; Max. 4K IPv6 entries	Max. 8K IPv4 entries; Max. 4K IPv6 entries	
<b>Routing table</b>	12K	12K	12K	
<b>IP interface</b>	256	256	256	
<b>Flash/RAM</b>	64 MB/1 GB	64 MB/1 GB	64 MB/1 GB	
<b>Power</b>				
<b>Input</b>	100 to 240V AC, 50/60 Hz	100 to 240V AC, 50/60 Hz	100 to 240V AC, 50/60 Hz	
<b>Max. power consumption (watt)</b>	47.0	60.1	70.16	
<b>Physical Specifications</b>				
<b>Item</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	441 x 270 x 44/ 17.36 x 10.63 x 1.73	441 x 270 x 44/ 17.36 x 10.63 x 1.73	441 x 360 x 44/ 17.36 x 14.17 x 1.73
	<b>Weight (kg/lb.)</b>	3.96/8.73	4.21/9.28	4.97/10.96
<b>Packing</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	616 x 355 x 107/ 24.25 x 13.98 x 4.21	616 x 355 x 107/ 24.25 x 13.98 x 4.21	616 x 355 x 107/ 24.25 x 13.98 x 4.21
	<b>Weight (kg/lb.)</b>	5.69/12.54	5.83/12.85	6.6/14.55
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	
<b>Environmental Specifications</b>				
<b>Operating environment</b>	<b>Temperature</b>	0°C to 50°C/ 32°F to 122°F	0°C to 50°C/ 32°F to 122°F	0°C to 50°C/ 32°F to 122°F
	<b>Humidity</b>	10% to 95% (non-condensing)	10% to 95% (non-condensing)	10% to 95% (non-condensing)
<b>Storage environment</b>	<b>Temperature</b>	-40°C to 70°C/ -40°F to 158°F	-40°C to 70°C/ -40°F to 158°F	-40°C to 70°C/ -40°F to 158°F
	<b>Humidity</b>	10% to 95% (non-condensing)	10% to 95% (non-condensing)	10% to 95% (non-condensing)
<b>MTBF (hr)</b>	860,610.82	794,270.06	815,860	
<b>Heat dissipation (BTU/hr)</b>	160.27	204.94	252.68	
<b>Acoustic noise @ 25°C (dBA)</b>	43.3	43.1	42.6	

# Features

## Standard Compliance

- IEEE 802.3 10Base-T Ethernet
- IEEE 802.3u 100Base-Tx Ethernet
- IEEE 802.3ab 1000Base-T Ethernet
- IEEE 802.3z 1000 Base-X
- IEEE 802.3az EEE support
- IEEE 802.3x flow control
- IEEE 802.3ad LACP aggregation
- IEEE 802.1AB LLDP/LLDP-MED
- IEEE 802.1D Spanning Tree Protocol (STP)
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- IEEE 802.1Q VLAN tagging
- IEEE 802.1p CoS support
- IEEE 802.1X Port authentication

## Resilience and Availability

- IEEE 802.1D Spanning Tree Protocol (STP)
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- Equal Cost Multipath Routing (ECMP)
- Virtual Router Redundancy Protocol (VRRP)
- CPU protection
- IEEE 802.3ad LACP
- Loop guard
- ErrDisable recovery
- MRSTP (Zyxel Proprietary)
- Dual configuration files
- Dual images
- Physical stacking (for XGS4600-32/32F)

## Traffic Control

- 802.1Q static VLANs/dynamic VLANs: 4K
- Port-based VLAN and VLAN isolation
- IP classification VLAN
- VLAN counter
- VLAN search
- VLAN translation
- VLAN MAC limit
- Rate limiting: policy-based/port-based bandwidth control with 64 kbps granularity
- Two Rate Three Color Marker (trTCM)
- CIR/PIR bandwidth control
- Port-based egress traffic shaping
- IEEE 802.1p with 8 priority queues per port
- DSCP/DSCP to 802.1p priority mapping
- Congestion control on all ports
- Selective Q-in-Q

## Security

- 802.1X
- Port security
- Layer 2 MAC filtering
- Layer 3 IP filtering
- Layer 4 TCP/UDP socket filtering
- Static MAC forwarding
- Multiple RADIUS servers
- Multiple TACACS+ servers
- 802.1x VLAN and 802.1p assignment by RADIUS
- Login authentication by RADIUS
- Login authentication by TACACS+
- TACACS+ accounting
- Authorization on RADIUS
- Authorization on TACACS+
- SSH v2
- SSL
- Intrusion lock
- MAC freeze
- MAC search
- MAC filtering
- DHCP snooping
- ARP inspection
- Static IP-MAC-Port binding
- Policy-based security filtering
- Port isolation
- Limited MAC number per port
- IP source guard
- Guest VLAN
- IEEE 802.1Q tag-based and port-based VLAN
- GVRP automatic VLAN member registration
- Full range 4K PVID support
- Limited MAC number per port
- IP filtering
- TCP/UDP socket filtering
- BPDU transparency
- IEEE 802.1X port-based authentication
- Enhanced 802.1X compensation assignment over VLAN
- Layer 2 protocol tunneling
- Root guard
- BPDU guard
- Storm control: Broadcast, multicast, unknown unicast (DLF)

## Quality of Service (QoS)

- No. of hardware queues per port: 8
- 802.3x flow control
- 802.1p Class of Service (SPQ, WFQ, WRR, hybrid-SPQ combination capable)
- DiffServ (DSCP)
- Port-based rate limiting (ingress/egress)

- Rate limiting per IP/TCP/UDP per port
- Policy-based rate limiting

## Layer 2 Multicast

- L2 multicast
- IGMP snooping v1, v2, v3
- IGMP throttling
- IGMP snooping fast leave
- IGMP snooping statistics
- Multicast VLAN Registration (MVR)
- IGMP filtering
- IGMP snooping immediate leave
- IGMP proxy mode & snooping mode selection
- MLD snooping

## Manageability

- SNMP v1, v2c, v3
- SNMP trap group
- RMON (1, 2, 3, 9)
- **New for V4.50** Custom default
- **New for V4.50** Syslog (IPv4/IPv6)
- ICMP echo/echo reply
- IEEE 802.1AB LLDP
- IEEE 802.1AB LLDP-MED
- **New for V4.50** Display port utilization

## IPv6 Management

- IPv6 over Ethernet (RFC 2464)
- IPv6 addressing architecture (RFC 4291)
- Dual stack (RFC 4213)
- ICMPv6 (RFC 4443)
- Path MTU (RFC 1981)
- Minimum path MTU size of 1280 (RFC 5095)
- Encapsulation for maximum PMTU of 1500
- Neighbor discovery (RFC 4861)
- DHCPv4/v6 server/relay
- Default DHCP client mode

## Device Management

- Zyxel iStacking™
- Web interface
- Management through Console, Telnet, SNMP
- Remote firmware upgrade by FTP/ Web/TFTP
- Configuration saving and retrieving
- Multiple logins supported
- Configure clone
- Multilevel CLI
- CLI (Cisco-like)
- CLV (Cisco-like VLAN)
- DHCP relay per VLAN
- DHCP client
- DHCP option 82

- Daylight saving
- NTP
- Port mirroring: ingress/egress/both port mirroring
- RS-232c local console
- sFlow

## Link Aggregation

- IEEE 802.3ad LACP link aggregation
- Static port trunking
- Up to 16 aggregation groups, 8 ports per group randomly selected
- Link aggregation algorithm of source/destination IP address

## IP Routing

- Wire-speed IP forwarding
- RIP v1, v2
- OSPF
- Static routing IPv4/v6
- OSPF summary address
- IGMP
- DVMRP
- ECMP
- IP port moving
- VRRP
- **New for V4.50** Assigned DHCP relay with specific source IP interface

## MIB

- Zyxel private MIB
- RFC 1066 TCP/IP-based MIB
- RFC 1213, 1157 SNMPv2c/v3 MIB
- RFC 1493 bridge MIB
- RFC 1643 Ethernet MIB
- RFC 1757 RMON group 1, 2, 3, 9
- RFC 2011, 2012, 2013 SNMPv2 MIB
- RFC 2233 SMIv2 MIB
- RFC 2358 Ethernet-like MIB
- RFC 2674 bridge MIB extension
- RFC 2819, 2925 remote management MIB
- RFC 3621 power Ethernet MIB
- RFC 4022 management information base for transmission control protocol
- RFC 4113 management information base for user datagram protocol
- RFC 4292 IP forwarding table MIB
- RFC4293 Management Information Base (MIB) for IP
- **New for V4.50** Cable diagnostic MIB

## Certifications

### Safety

- ANSI/UL 60950-1
- CSA 60950-1
- EN 60950-1
- IEC 60950-1

## EMC

- FCC Part 15 (Class A)
- CE EMC (Class A)

## Zyxel One Network

### ZON Utility

- Discovery of Zyxel switches, APs and gateways
- Centralized and batch configurations
- IP configuration
- IP renew
- Device factory reset
- Device reboot
- Device locating
- Web GUI access
- Password configuration
- One-click quick association with Zyxel AP Configurator (ZAC)

### Smart Connect

- Discover neighboring devices
- One-click remote management access to the neighboring Zyxel devices
- Reset neighboring devices remotely to factory defaults
- Power cycle neighboring powered devices (PoE switches only)

## Warranty

- Limited life-time warranty\*

\* Warranty terms, service availability, and service response times may vary from country or region to country or region.

## Accessories

### Transceivers (Optional)

Model	Speed	Connector	Wavelength	Max. Distance	DDMI
SFP10G-SR	10-Gigabit SFP+	Duplex LC	850 nm	0.3 km (328 yd)	Yes
SFP10G-LR	10-Gigabit SFP+	Duplex LC	1310 nm	10 km (10936 yd)	Yes
SFP-1000T	Gigabit	RJ-45	-	0.1 km (109 yd)	-
SFP-BX1310-10-D	Gigabit	LC	1310 nm (Tx); 1490 nm (Rx)	10 km (10936 yd)	Yes
SFP-BX1490-10-D	Gigabit	LC	1490 nm (Tx); 1310 nm (Rx)	10 km (10936 yd)	Yes
SFP-LHX1310-40-D	Gigabit	LC	1310 nm	40 km (43744 yd)	Yes
SFP-LX-10-D	Gigabit	LC	1310 nm	10 km (10936 yd)	Yes
SFP-SX-D	Gigabit	LC	850 nm	0.55 m (601 yd)	Yes
SFP-ZX-80-D	Gigabit	LC	1550 nm	80 km (87488 yd)	Yes
SFP-100BX1310-20-D	Fast Ethernet	LC	1310 nm (Tx); 1550 nm (Rx)	20 km (21872 yd)	Yes
SFP-100BX1550-20-D	Fast Ethernet	LC	1550 nm (Tx); 1310 nm (Rx)	20 km (21872 yd)	Yes
SFP-100FX-2	Fast Ethernet	LC	1310 nm	2 km (2187 yd)	-
SFP-100LX-20	Fast Ethernet	LC	1310 nm	20 km (21872 yd)	-
SFP-100TX	Fast Ethernet	RJ-45	-	0.1 km (109 yd)	-

### Direct Attach Cables (Optional)

Model	Connector	Cable Length
DAC10G-1M	SFP+ to SFP+	1m (39.37 inch)
DAC10G-3M	SFP+ to SFP+	3m (118.11 inch)

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2017 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet XGS4600 Series



5-100-01017017 10/17