


# DIGITUS Professional Cat.6 U/UTP installation cable, 305 m, simplex, Dca

DK-1614-VH-305  
EAN 4016032435785

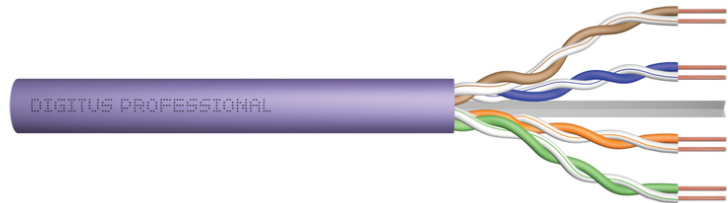

## CAT 6 U-UTP installation cable, 250 MHz, AWG 23/1 Dca (LSZH-1), 305 m, paper box, simplex, purple

The Digitus® Professional Cat.6 U/UTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 250 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-6-1.

### Future-oriented standards and high-end quality for your network.

- Physical properties:
- Basic conductor: Solid AWG 23/1, bare annealed copper, diameter 0.57 mm nominal
- Insulation: HD-PE
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer jacket: Halogen-free (FRNC-B/LSZH-1)
- Outer jacket diameter: 0.50 mm nominal
- Color: Purple (RAL 4005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter: 6.2 mm nominal
- Flame retardancy: IEC 60332-1
- Halogen-free & smoke-proof: IEC 60754-2 & IEC 61034
- Fire load: 320 Mj/km

- Electrical properties:
- Mean impedance: 100±50Ωm at 1MHz - 600MHz
- Capacitance: 48 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- DC loop resistance: 147 Ωm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: 40 dB
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- NVP: 69%
- Nominal cross section conductor: 0.26
- Core insulation: PE (polyethylene)
- Core identification: Colour
- Core identification: Colour
- Flame retardant: In accordance with EN 60332-1-2
- Stranding element: Pairs
- Colour outer sheath: Other
- Category: 6
- Conductor material: Cu, bare
- Screen over stranding element: None
- Screen over stranding: None
- Material outer sheath: Polyolefin
- Conductor category: Class 1 = solid
- Permitted cable outer temperature, in movement: -20 ... 60
- Permitted cable outer temperature, fixed: -20 ... 75
- AWG-size: 23
- Number of cores: 1
- Outer diameter approx.: 6.2
- Low smoke (acc. EN 61034-2): yes
- NVP value: 69
- Halogen free (acc. EN 60754-1/2): yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Inside	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Single	1	12.30	45.00	44.50	25.00	50,062.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

