

W20 Lockable Double Door Wall Box – SC / LC / E2000 Adaptors / Pigtails



DESCRIPTION

The wall box system can be supplied unloaded ready for the installer to load with their choice of adaptors, or pre-loaded with adaptors ready for installation. With the ability to use a full array of adapter types, this wall box offers a flexible solution to the end user, enabling them to incorporate a multi functional wall mounted box which allows easy access during installation or rework with no disturbance of existing cable or fibers. In addition to the array of adaptors the box also offers multiple cable entry and exit solutions: up to 8 standard entry points for loose tube, tight buffered, Preterminated, steel tape armored cable and 2 slotted positions for patch cord exit.

FEATURES/BENEFITS

- Up to 72 fiber
- Multiple adapter options
- 36 adapter positions
- RoHS, REACH, SvHC
- Available in single door and double door versions
- Internal bend radius protection included


APPLICATIONS

- Internal applications
- For use in multi dwelling units or demarcation points within a network
- Data centers or telecommunication networks


SPECIFICATIONS

Height	360 mm
Width	360 mm
Depth	98 mm
Net Weight	7.5 kg
Packaged Weight	7.8 kg
Package Dimensions	420mm (W) x 400mm (D) x 106mm (H)
IP Rating	IP 20
Suitable for adapter type	SC Simplex, LC Duplex, E2000
Number of doors	2
Cable entry	4 x 20 mm 4 x 25 mm
Material	Cold Rolled Steel
Material	thickness 1.2mm
Material coating	Electro Static Powder Coating
Colour	Grey RAL 7035
Operating temperature	-40°C to + 60°C
Compliant to	RoHS, Reach, SVHC
Designed in accordance with TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1	

Top / Bottom View

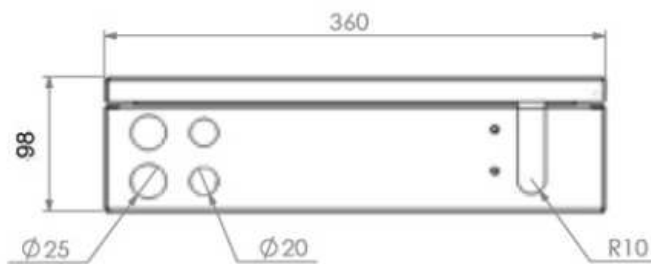

SC Simplex



Front View

