


LATIGUILLO BIFIBRA 50/125 OM3

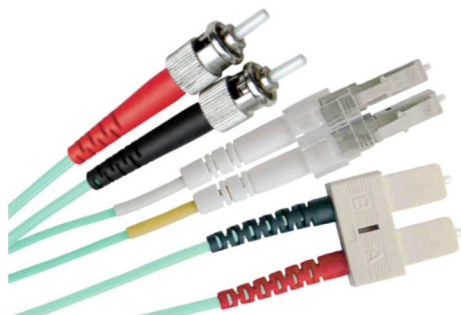

Características del producto


Los latiguillos de conexión dúplex están fabricados con fibra óptica de 900 μm de la mayor calidad, terminados con conectores con casquillo de cerámica. Cada cable cuenta con fundas de alivio de tensión para prolongar y mantener los niveles de rendimiento del montaje, las ramificaciones de transmisión y recepción de cada cable dúplex están claramente identificadas mediante un marcador con forma de anillo en cada extremo del montaje. A poca distancia de estos anillos identificativos se aplica una técnica termocontraíble para mantener un cable enlazado de dos fibras de fácil manipulación.

Modelos disponibles

ST-ST	SC-SC	ST-SC	LC-LC	LC-SC	LC-ST
NO					

Product Schematics


ST

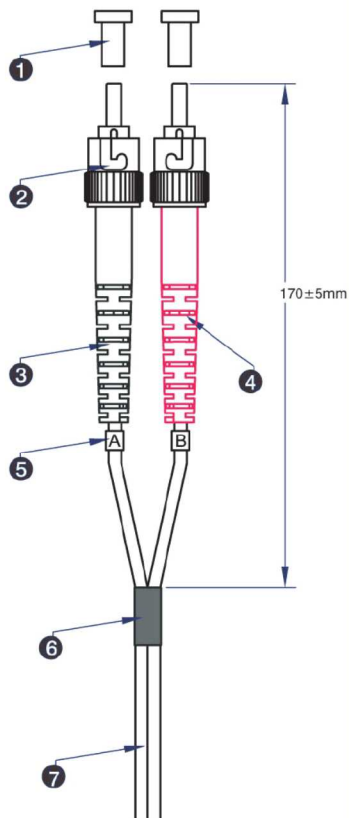

- ① ST Dust cover
- ② ST 3.0 multimode connector*
- ③ ST 3.0 Black strain relief boot*
- ④ ST 3.0 Red strain relief boot*
- ⑤ Identification ring
- ⑥ Black heatshrink tubing
- ⑦ 3.0mm Duplex OM3 50/125 LSOH Aqua cable*

* 2.0 when used in hybrid cables with LC or MTRJ connectors


SC

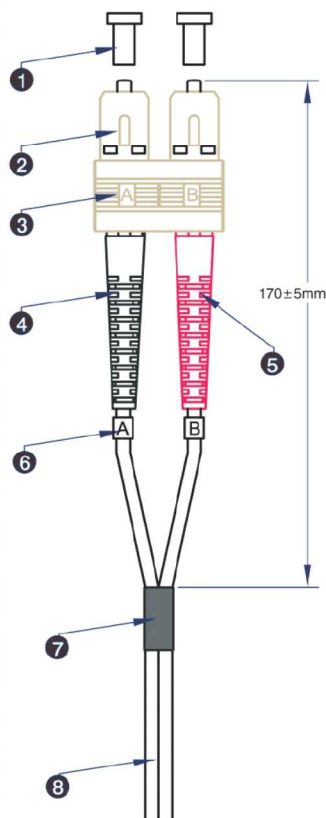

- ① SC Dust cover
- ② SC 3.0 Beige multimode connector*
- ③ SC Beige clip
- ④ SC 3.0 Black strain relief boot*
- ⑤ SC 3.0 Red strain relief boot*
- ⑥ Identification ring
- ⑦ Black heatshrink tubing
- ⑧ 3.0mm Duplex OM3 50/125 LSOH Aqua cable*

* 2.0 when used in hybrid cables with LC or MTRJ connectors

LC

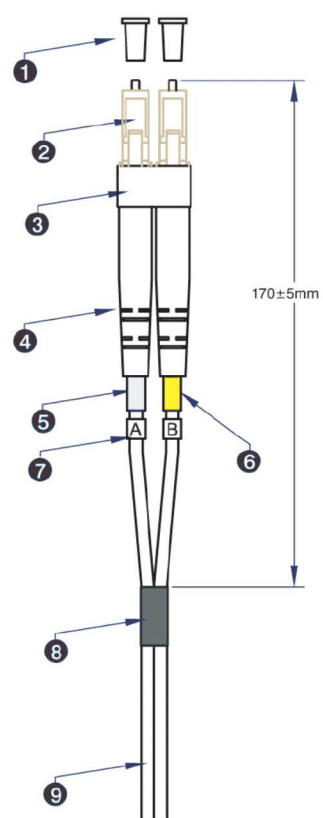

- ① LC Dust cover
- ② LC 2.0 multimode simplex Beige connector
- ③ LC Beige clip
- ④ LC 2.0 white boot
- ⑤ White heatshrink tubing
- ⑥ Yellow heatshrink tubing
- ⑦ Identification ring
- ⑧ Black heatshrink tubing
- ⑨ 2.0mm Duplex OM3 50/125 LSOH Aqua cable